



General Description:

MM-MPA-040060-30-36 is a Waveguide Power Amplifier that operates over the frequency range of 40 to 60 GHz. This model provides a typical gain of 30 dB . It provides a Psat of 36 dB typical and operates on +19 VDC with a typical current draw of 4500 m A.

Features:

- Ultra Wide Band: 40-60 GHz
- Gain: 30 dB
- Psat: 36 dB
- Internally regulated
- Unconditionally stable

Applications:

- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (23° C):

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	40		60	GHz
Gain		30		dB
Gain Flatness		-		dB
Psat	36			dBm
Output Power (P1dB)		-		dBm
Input VSWR		2.0		:1
Output VSWR		2.0		:1
RF Input Power		-		dBm
DC Voltage		+19		V
DC Current		4500		mA

Absolute Maximum Ratings:

Condition	Value
DC Voltage	+19 V
Maximum Input Power(CW)	TBD
ESD sensitivity (HBm)	Class 0, passed 150V

Mechanical Specifications:

Parameter	Value
Length	84 mm
Width	50 mm
Height	31 mm
RF Connector	WR19/UG-383




Mountain Microwave

Focus on the future Waveguide Power Amplifier

MM-MPA-040060-30-36

40 to 60 GHz

Outline Drawing:

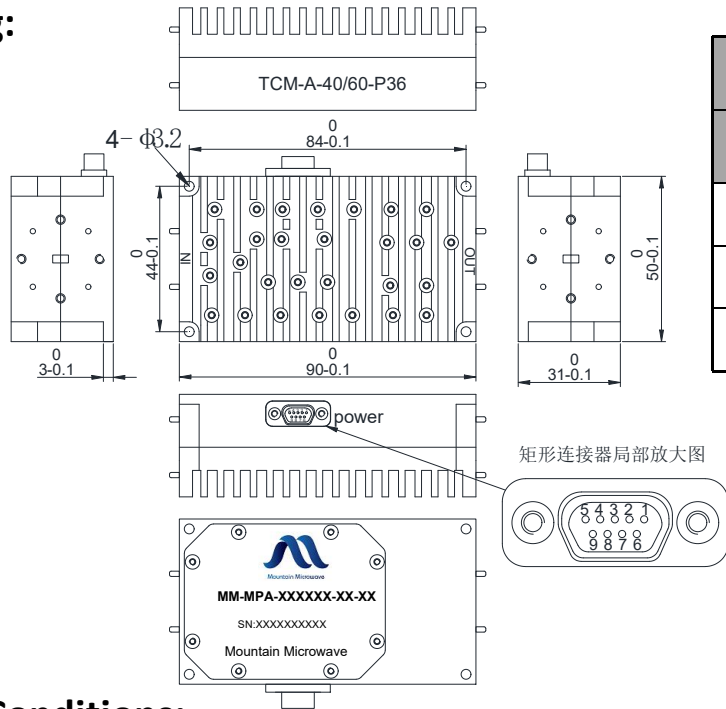

MICRO-D15 Female Define	
引脚 Pin #	功能Function
1-4	+19V
5	NC
6-9	GND

mm(Inches)

Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		-10°C~+40°C
Storage Temperature		0°C~+50°C
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40°C
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Heat Sink required during operation.

Please note, all information contained in this data sheet is subject to change without notice.

ver 2.0 0318