



General Description:

MM-MPA-050075-38-18 is a Waveguide Power Amplifier that operates over the frequency range of 50 to 75 GHz. This model provides a typical gain of 38 dB . It provides a Psat of 18 dB typical and operates on +5 VDC with a typical current draw of 550 mA.

Features:

- Ultra Wide Band: 50-75 GHz
- Gain: 38 dB
- Psat: 18 dB
- Internally regulated
- Unconditionally stable

Applications:

- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (23° C):

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	50		75	GHz
Gain	35	38		dB
Gain Flatness		-		dB
Psat		18		dBm
Output Power (P1dB)		-		dBm
Input VSWR		2.5		:1
Output VSWR		2.5		:1
RF Input Power		-		dBm
DC Voltage		+5		V
DC Current		550		mA

Absolute Maximum Ratings:

Condition	Value
DC Voltage	+5 V
Maximum Input Power(CW)	TBD
ESD sensitivity (HBm)	Class 0, passed 150V

Mechanical Specifications:

Parameter	Value
Length	60 mm
Width	45 mm
Height	24 mm
RF Connector	WR15/UG-385




Mountain Microwave

Focus on the future Waveguide Power Amplifier

MM-MPA-050075-38-18

50 to 75 GHz

Outline Drawing:

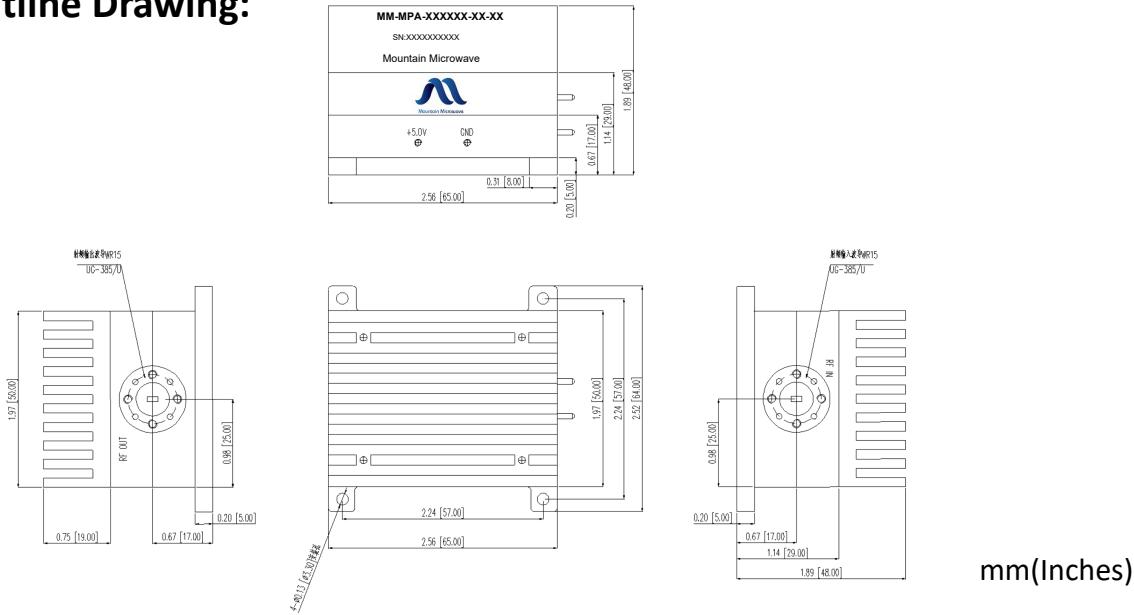

mm(Inches)

Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		0°C~+65°C
Storage Temperature		-55°C~+125°C
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40°C
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Heat Sink required during operation.

Please note, all information contained in this data sheet is subject to change without notice.

ver 2.0 0318